


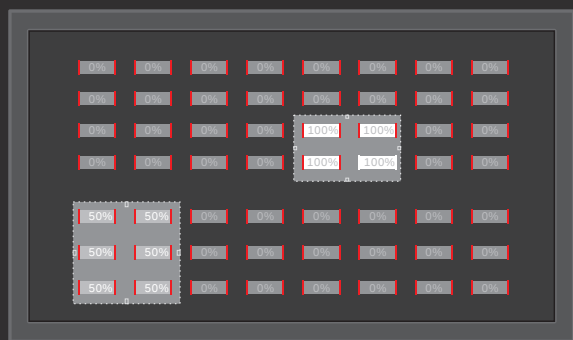


DALI stands for Digital Addressable Lighting Interface. Connected with computer/ tablet / mobile phone control terminal through operational software, we can accurately control each lamp or lamps in a certain area.

Características Técnicas

Modelo	A03	A06	A09
Lumenes	3300lm	6600lm	9900lm
Potencia	30W	60W	90W
Eficiencia	110lm/W(CCT=5000K)		
CCT	3000K,4000K,5000K		
CRI	70Ra,80Ra,90Ra		
Angulos	30°x70°,60°x90°,120°		
LED	28pcs	56pcs	84pcs
Voltaje	100-277V AC,47-63Hz,PF≥0.93		
Protección IP	IP65		
Driver	Meanwell IP65		
Modelo	A12	A15	A18
Lumenes	13200lm	16500lm	19800lm
Potencia	120W	150W	180W
Eficiencia	110lm/W(CCT=5000K)		
CCT	3000K,4000K,5000K		
CRI	70Ra,80Ra,90Ra		
Angulos	30°x70°,60°x90°,120°		
LED	112pcs	140pcs	168pcs
Voltaje	100-277V AC,47-63Hz,PF≥0.93		
Protección IP	IP65		
Driver	Meanwell IP65		

Accesorios

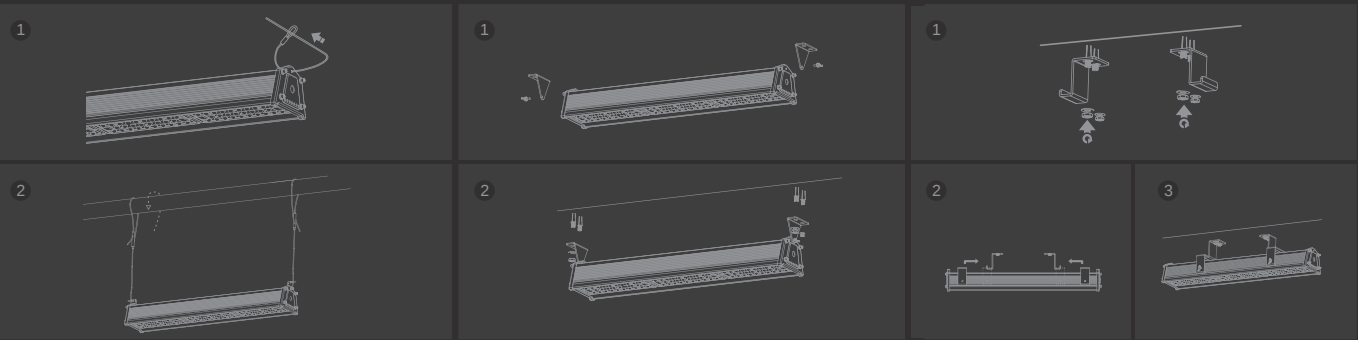

LED RACK



LED RACK

La luminaria Diseñada para los mas exigentes de la Industria


LED Rack la luminaria Diseñada y Creada para dar una iluminacion Rectangular sin necesidad de consumir e iluminar mas de lo que realmente se ocupa.

★ Eficiencia



ystem efficacy, up to 110lm/w.
I COB and HID, HiRack saves
y.

★ Ángulos

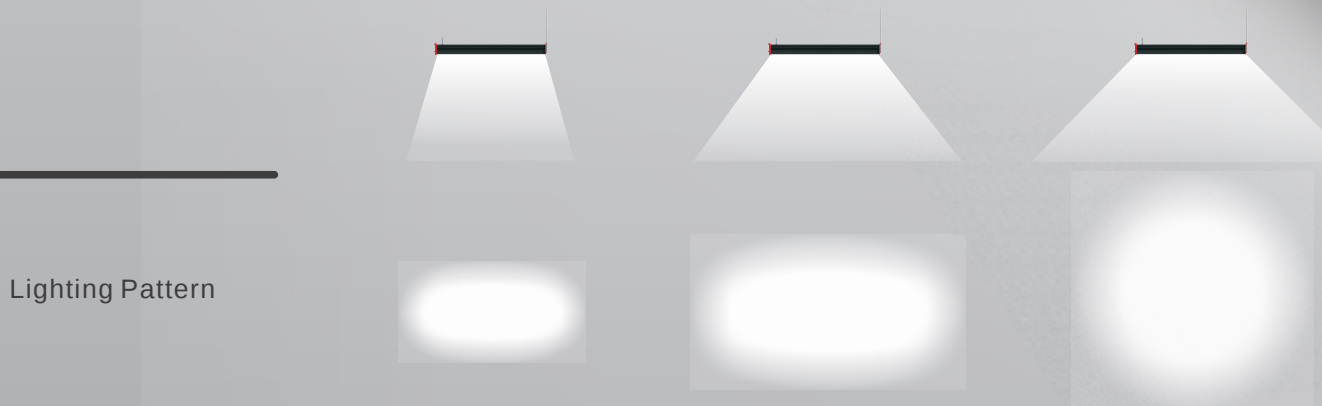


Lighting Pattern

Beam angle	30°x70°	60°x90°	120°
Applications	Warehouse aisle	Warehouse and Workplane	Docking areas



★ ZigBee

You can remotely control Zigbee HiRack on/off and dimming by your mobile phone/tablet at home. Or control lamps by remote controller.

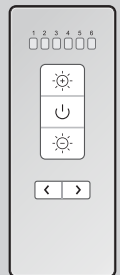


Remote controller




Phone

ZigBee control APP


★ Daylight sensor

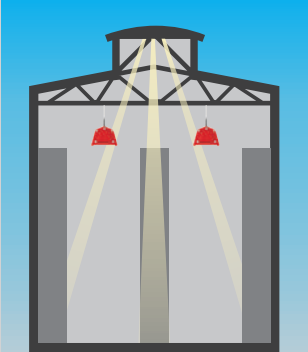


Daylight sensor combined with motion sensor, if with sufficient ambient light (100%), the lamp turns off at once, even with motion trigger.

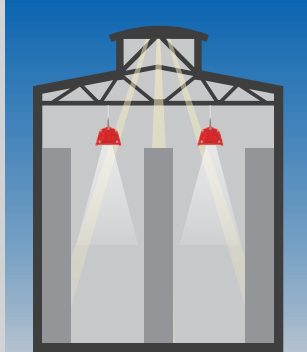

If ambient light goes down to 50%, the lamp switches on to keep the preset illumination level (set in the motion sensor).

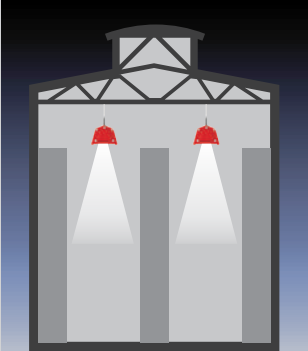


When ambient light is below preset illumination level or down to 0%, the lamps switches on automatically, to the illumination level as preset.

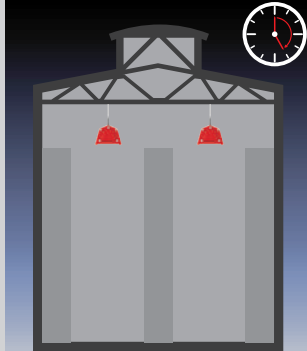

Hold time.
After no motion detected, refers to this time period, the lamp remains the illumination level preset before it completely switches off.



When people leave the detection area, light will dim to an illumination level preset and off after a certain time.



The sensor automatically switches on light when motion detected.